


#27 / 28 Switching in Spokane

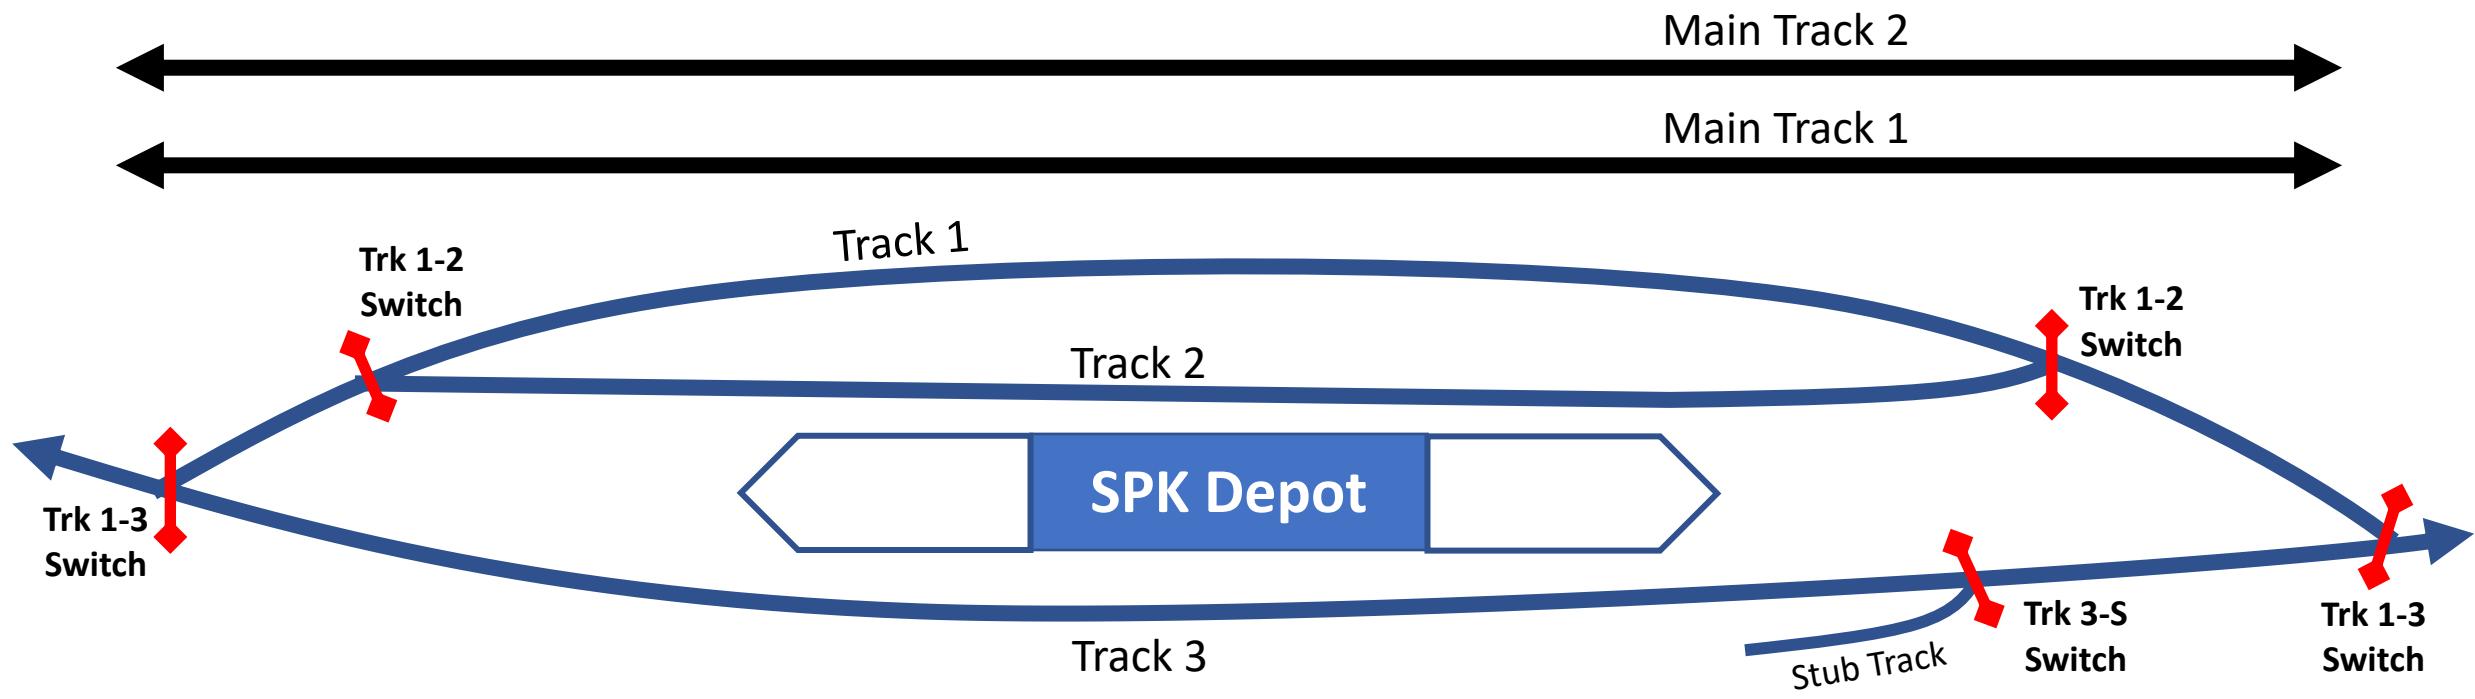

EAST

Train 28

28 pulls into Trk 2. Mechanical makes the cuts (pulls cables). Line 1-2 E switch for Trk 1 allowing 8 to run down Trk 1 passing the 1-2 switch E. Line 1-2 E for Trk 2 allowing 28 to pull behind 8. Conductor cuts 28 engine away. Once 28 engine is past 1-2 switch E, line the switch back to Trk 1. Conductor shoves 28 engine into Trk 1. Once 28 passes switch, line for Trk 2. 8 shoves train to hook with 28. Line 1-2 E for Trk 1. 28 engine pulls forward past switch. Line for Trk 2. Conductor shoves 28 engine to hook to 8 engine.

Fence

Train 27

Train 7 pulls into Trk 3. 28 engine will be in Stub Track or on Trk 2. Line 1-3 W switch for Trk 3 allowing train 7 to depart depot. Once train 7 has left, line switch for 28 engine. Line behind for correct track. Shove engine to a safety stop.

WEST